


1. See Diagram A. Measure the external dimension of your stretched canvas.
2. Deduct 20mm / 3/4" from each of these two dimensions.
Deducting 20mm from each dimension gives you the sizes to set on your Morso.
3. First moulding L1657. If you set your Morso in the normal way using the reduced dimensions by 20mm, this will cut a frame with a rebate smaller than the canvas. The canvas can be laid on the surface of the frame, set back slightly from the rebate below.
4. Then cut the second moulding L1656 to fit the outside of the inner frame, then cut the slip L1341 to fit inside this frame as a spacer.
If joining the slip with an underpinner, remember not to use the rebate clamp. Marks left by the clamp may show on the visible part of the spacer.
5. Assemble all the parts using Canvas Offsets, MultiPoints or a combination. Canvas offsets, 18mm, Bridge the gap between the back of the stretched canvas and the back of the first frame. Join frames with MultiPoints and screws.
6. In Diagram B the slip has been left out. This is a simpler version of the same idea.

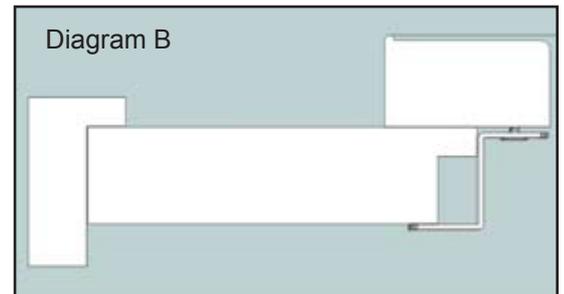

See current LION Mouldings catalogue for:

- L1657 Vermont Walnut Veneer
- L1656 Vermont Walnut Veneer
- L1341 Deep Rebate Spacer

See current LION Trade catalogue for:
Canvas Offsets
Multi Master & Multi Points
Stretcher Bars
Canvas

